

7721AD8-HD, 7721AD8-B-HD

HD/SD-SDI 8 AES (16 Channel) Audio De-embedder



The 7721AD8-HD Audio De-embedder extracts embedded audio from all four groups of a 1.5Gb/s HD or a 270Mb/s SD video signal as specified in ST 299-1 or 272M respectively. The module supports 24-bit AES audio de-embedding for HD and 20-bit audio de-embedding for SD. Up to 16 selected channels may be de-embedded and directed to eight AES outputs. In addition, a full 16x16 audio channel router is available for channel re-mapping.

The 7721AD8-HD is Dolby-E® compliant and handles Dolby-E® metadata. Metadata is optionally de-embedded from VANC and can be provided as an output for downstream devices like Dolby-E® or Dolby AC-3® Encoders.

VistaLINK® enables control and configuration capabilities via Simple Network Management Protocol (SNMP). This offers the flexibility to manage the module status monitoring and configuration locally or remotely.

► Features & Benefits

- Audio de-embedding from 1.5Gb/s HD or 270Mb/s SD video
- Automatic detection of input video standard
- Two 1.5Gb/s HD or 270Mb/s SD serial video outputs
- Supports 24-bit AES audio de-embedding for HD and 20-bit AES audio de-embedding for SD
- Flexible 16x16 audio channel routing for channel re-mapping
- Dolby-E® compliant with VANC decode and output of Dolby metadata
- Card edge display for status and miniature bar graphs for audio peak levels
- Card edge LEDs indicate video and audio signal presence and module fault
- VistaLINK® capable for remote monitoring, control and configuration capabilities via SNMP; using VistaLINK® PRO, CP-2116E or CP-2232E Control Panels. VistaLINK® is available when modules are used with the 3RU 7800FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

Inputs


- 1.5Gb/s HD or 270Mb/s SD serial video

Outputs

- Dolby Metadata output (RS-422/485)
- Eight AES de-embedded outputs
- Two re-clocked HD/SD serial video outputs

Controls

- Audio channel routing selection
- VANC decoder line, DID, and sSDID

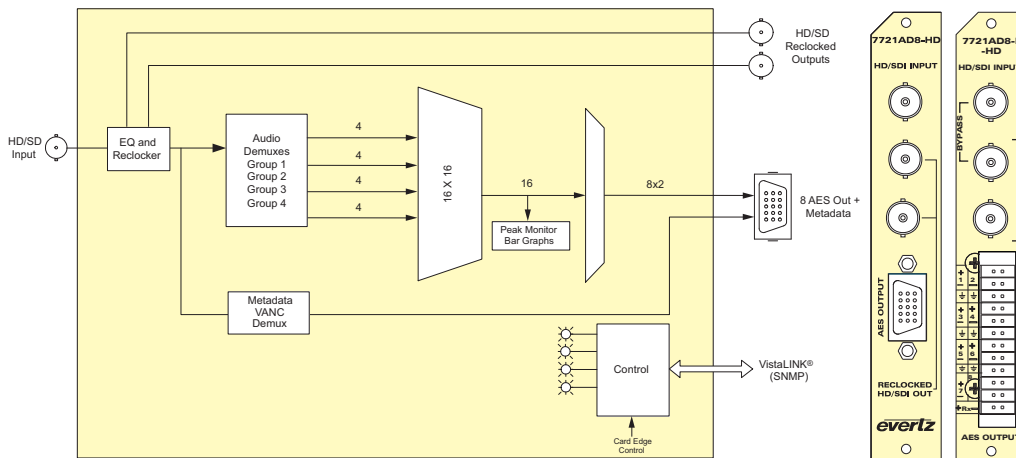

► Specifications

Serial Video Input:

Standard: ST 292-1 (1.5Gb/s), (1080i/60, 1080i/59.94, 1080/50, 1080p/30sF, 1080p/29.97sF, 1080p/25sF, 1080p/24sF, 1080p/23.98sF, 720p/60, 720p/59.94), 1035i/60, 1035i/59.94, 1080p/30, 1080p/29.97, 1080p/25, 1080p/24, 1080p/23.98, 720p/50
 SMPTE ST 259 (270Mb/s)
 525 or 625 line
 Connector: 1 BNC per IEC 61169-8 Annex A

Embedded Audio Input:

Standard: ST 299-1 - 24-bit 48kHz synchronous
 SMPTE ST 272 - 20-bit 48kHz synchronous

Metadata Output:

Type: Dolby-E® Metadata (RS-422)
 Connector: DB15 to BNC 6ft breakout cable or terminal block
 Baud Rate: 115,200 baud (as per Dolby-E® usage)

Serial Video Outputs Re-clocked:

Standard: Same as input
 Number of Outputs: 2
 Connectors: BNC per IEC 61169-8 Annex A
 Return Loss: > 15dB up to 1.5Gb/s
 Wide Band Jitter: < 0.2 UI

AES Audio Outputs:

Standard: SMPTE 276M, single ended AES
 Number of Outputs: 8
 Connector: DB15 to BNC 6ft breakout cable or terminal block
 Sampling Rate: 48kHz
 Impedance: 75Ω unbalanced or 110Ω balanced
 Resolution: Up to 24-bit
 Signal Level: 1V p-p ±0.1V @ termination load

Electrical:

Voltage: +12V DC
 Power: 11W
 EMI/RFI: Complies with FCC Part 15, Class A
 EU EMC Directive

Physical (number of slots):

350FR: 1
 7700FR-C: 1
 7800FR: 1

► Ordering Information

7721AD8-HD	HD/SD-SDI 8 AES (16 Channel) Audio De-embedder
7721AD8-B-HD	HD/SD-SDI 8 Balanced AES (16 Channel) Audio De-embedder

Ordering Options Rear Plate must be specified at time of order (Eg: Model +3RU)

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR, 7700FR-C or 7800FR Multiframe
+SA Standalone Enclosure Rear Plate

Accessories

7700FC VistaLINK® Frame Controller
CP-2116E-H Remote Control Panel
CP-2232E Remote Control Panel

Enclosures

350FR 3RU Portable Multiframe which holds up to 7 single slot modules
7700FR-C 3RU Multiframe which holds up to 15 single slot modules
7800FR 3RU Multiframe which holds up to 15 single slot modules
7801FR 1RU Multiframe which holds up to 4 single or 2 dual slot modules
S7701FR Standalone Enclosure