


The CP-3208E is an eight destination control panel that can handle up to 32 sources. It is ideal in applications such as monitoring or live operational areas, where several destinations are to be controlled rapidly with a single button selection.

The status of each destination is visible at all times for increased operational confidence.

### ►Features & Benefits

- Eight displays show the current source selected to each destination
- High brightness, green LED displays with up to seven character names
- 32 buttons for source selection and eight TAKE buttons for the destinations
- TAKE button can optionally be cleared or retain the last source selection
- 15mm square buttons suitable for film legends with green LED illumination, uniform over whole legend surface
- LOCK button can be assigned to protect against accidental or unauthorized selections
- Camera joystick override on any eight inputs, with momentary and latching action
- Supports Qlink for legacy router control. Directly connects to most Evertz® routers for simple router control. Contact factory to ensure support
- Supports Ethernet for connection to MAGNUM Router Control system (Please contact the Factory to obtain a list of Routers which can support Ethernet panels directly)

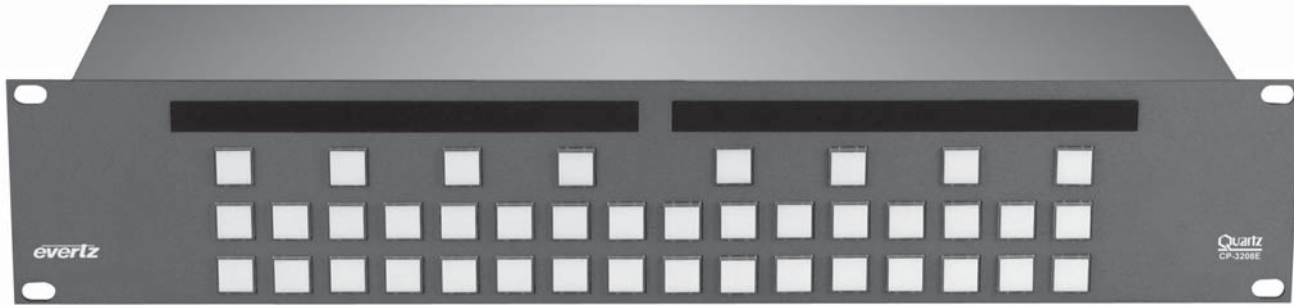

### ►Specifications

<b>Control:</b>	8 Parallel contact closures, TTL levels (GPI) D9 male	<b>Electrical:</b>	Auto-ranging 100 ↔ 240V AC, 50/60Hz	<b>Desk Top Mounting (Optional):</b>	Panel Depth: 1.4" (35mm)
Joystick:		Voltage:		Chassis Depth:	3.5" (89mm)
Qlink:	75Ω coaxial connection for direct connection to routers BNC, "T" adapter and termination required	Power:	40W	Distance from Panel to Chassis:	40" (1m)
Ethernet:	Standard Ethernet interface for connection to MAGNUM Router Control system. RJ45. (Please contact the Factory to obtain a list of Routers which can support Ethernet panels directly)	Fuse Rating:	250V, 1A, time delay	<b>Compliance:</b>	
		<b>Physical:</b>		Safety:	TÜV listed, complies with EU safety directives
		Height:	3.5" (89 mm) 2 RU standard rack height	EMI/RFI:	Complies with FCC Part 15 Class A regulations
		Width:	19" (483 mm) 19" Rack Mount		Complies with EU EMC directive
		Depth:	3.5" (89 mm) not including connectors		
		Weight:	4 lbs. (1.81 kg)		
		Operating Temp:	0-40°C		

### ►Ordering Information

<b>CP-3208E</b>	Control Panel, 2RU 40 Button-per-source with source display for 8 destinations
-----------------	--

<b>Ordering Options</b>	
<b>+2PS</b>	Redundant Power Supply
<b>Accessories</b>	
<b>CP-3208E-DMK</b>	Desk Mount Kit for CP-3208E