

CP-6401E


Control Panel, 2RU 80 Buttons

The CP-6401E is a versatile programmable panel with 80 illuminated push buttons. A wide range of panel operations including XY and multi-destination may be configured.

Buttons can be individually configured for any combination of source, destination, or control function. For instance, this panel can be configured as a 16 button-per-source panel leaving four buttons for lock, destinations, etc.

► Features & Benefits

- 15mm square buttons suitable for film legends with green LED illumination, uniform over whole legend surface
- Buttons with high quality positive action
- All panels are fully programmable to operate in a number of modes
- Split panels can be programmed in many ways, for instance, permitting four separate destinations to be controlled using four rows of source buttons
- LOCK button can be assigned to protect against accidental or unauthorized selections
- Camera joystick override on any eight inputs, with momentary or latching action
- Supports Qlink for legacy router control. Directly connects to most Evertz® routers for simple router control. Contact factory to ensure support.
- Supports Ethernet for connection to MAGNUM Router Control system (Please contact the Factory to obtain a list of Routers which can support Ethernet panels directly)

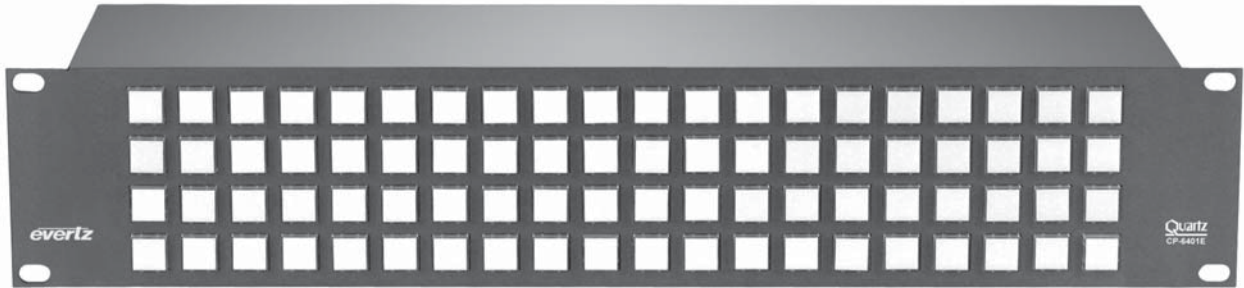

► Specifications

Control:		Electrical:		Desk Top Mounting (Optional):	
Joystick:	8 Parallel contact closures, TTL levels (GPI) D9 male	Voltage:	Auto-ranging 100 ↔ 240V AC, 50/60Hz	Panel Depth:	1.4" (35mm)
Qlink:	75Ω coaxial connection for direct connection to routers BNC, "T" adapter and termination required	Power:	40W	Chassis Depth:	3.5" (89mm)
Ethernet:	Standard Ethernet interface for connection to MAGNUM Router Control system. RJ45. (Please contact the Factory to obtain a list of Routers which can support Ethernet panels directly)	Fuse Rating:	250V,1A, time delay	Distance from Panel to Chassis:	40" (1m)
		Physical:		Compliance:	
		Height:	3.5" (89 mm) 2 RU standard rack height	Safety:	TüV listed, complies with EU safety directives
		Width:	19" (483 mm) 19" Rack Mount	EMI/RFI:	Complies with FCC Part 15 Class A regulations
		Depth:	3.5" (89 mm) not including connectors		Complies with EU EMC directive
		Weight:	4 lbs. (1.81 kg)		
		Operating Temp:	0-40°C		

► Ordering Information

CP-6401E Control Panel, 2RU, 80 button

Ordering Options

+2PS Redundant Power Supply

Accessories

CP-6401E-DMK Desk Mount Kit for CP-6401E