

MIO-CCM-4K/3G

SMPTE ST 2110 and/or 4K/3G/HD/SD Closed Caption
CEA-608 and CEA-708 Monitor



The MIO-CCM-4K/3G is a CEA-608 and CEA-708 closed caption monitor, decoder and analyzer that extends the signal monitoring capabilities of the Evertz monitoring product line by focusing on closed captions.

The MIO-CCM-4K/3G has the capability to decode CEA-608 and CEA-708 closed captions, providing a flexible and cost-effective solution for both caption domains. The auto-detecting program input supports 4K, 3G, HD and SD video formats.

The MIO-CCM-4K/3G also provides a detailed and comprehensive status display to the current state of the closed caption data. This status display can inform operators quickly if an error was detected.

This dual-slot MIO module can be flexibly housed in either: a SCORPION-2 frame capable of holding a single MIO-CCM-4K/3G module; a SCORPION-4/6 frame capable of holding up to two MIO-CCM-4K/3G modules; or a SCORPION-X18 frame capable of holding up to eight MIO modules.

MIO-CCM-4K/3G is WebEasy, MAGNUM and VistaLINK® PRO-capable for remote monitoring, control and configuration capabilities via SNMP.

Features & Benefits

- Auto-detecting SMPTE ST 259M, ST 292M, ST 424M and ST 2082 program video input
- Monitoring output decodes and displays CEA-608 or CEA-708 closed captions
- Decodes XDS packets containing TSID, CGMS-A, Program ID, Time in Show, Program Name, Program Type, V-Chip Rating, Program Description, Network Name, Station ID, Time of Day and Time of Zone
- Closed caption line shift (up and/or down) via GPI trigger to avoid on screen crawl messages such as EAS
- User-configurable presets
- Optional IP media streaming (+MS) compatible with Evertz' Caption Conductor system to provide this capability to caption encoders (7825CCE-3G, HD9084) that don't have it

MIO-CCM-4K/3G

SMPTE ST 2110 and/or 4K/3G/HD/SD Closed Caption
CEA-608 and CEA-708 Monitor



Specifications

Electrical Inputs:

Reclocked Standards: SMPTE ST 2081 (12G-SDI),
SMPTE ST 424M (3G),
SMPTE ST 292M (1.5G),
SMPTE ST 259M (270Mb)
DVB-ASI
Connector: HD-BNC
Impedance: 75Ω (nominal)
Equalization: Automatic to 80m @ 3G,
100m @ 1.5G, 250m @ 270Mb
(with Belden 1694A or equivalent)
Return Loss: > 15dB up to 1.5GHz,
> 10dB up to 3GHz,
> 7dB up to 6GHz,
> 4dB up to 12GHz

Electrical Outputs:

Connector: HD-BNC
Impedance: 75Ω (nominal)
Signal Level: 800mV (nominal)
DC Offset: 0V ±0.5V
Rise and Fall Time: Reclocked SFPs only
12G: <45ps
3G/HD: <135ps
SD: <900ps
Overshoot: <10% of amplitude
(reclocked SFPs only)
Alignment Jitter: Reclocked SFPs only;
<0.2UI to 1.485GB/s,
<0.3UI to 2.97GB/s,
<0.3UI to 12GB/s

Physical:

Power Consumption: 20W
Requires: Dual-slot MIO
Operating Temp.: 0-70°C

Ordering Information


MIO-CCM-4K	SMPTE ST 2110/4K/3G/HD/SD-SDI dual-slot MIO module for use in any SCORPION chassis; includes closed caption monitoring software to monitor, decode and analyze CEA-608 and CEA-708 closed captions
MIO-CCM-3G	SMPTE ST 2110/3G/HD/SD-SDI dual-slot MIO module for use in any SCORPION chassis; includes closed caption monitoring software to monitor, decode and analyze CEA-608 and CEA-708 closed captions
MIO-CCE-4K	SMPTE ST 2110/4K/3G/HD/SD-SDI dual-slot MIO module for use in any SCORPION chassis; includes closed captioning encoder software with non-media streaming; requires additional MIO modules for modem and serial, requires +MS license to add media streaming
MIO-CCE-3G	SMPTE ST 2110/3G/HD/SD-SDI dual-slot MIO module for use in any SCORPION chassis; includes closed captioning encoder software with non-media streaming; requires additional MIO modules for modem and serial, requires +MS license to add media streaming.

Ordering Options:

+MS	Media streaming license enabling media (audio/video) over IP streaming
MIO-CCE-AUX-IO	Dual-slot MIO module adding support for up to 8x GPIO and 3x serial RS-232/RS-422 data I/O

Enclosures:

SCORPION-2	SCORPION miniature frame, holds 2x single- or 1x dual-slot modules
SCORPION-4	SCORPION standalone frame, holds 4x single- or 2x dual-slot modules
SCORPION-6	SCORPION standalone frame, holds 6x single- or 2x dual-slot modules
SCORPION-X18	SCORPION multiframe, holds 18x single- or 8x dual-slot modules

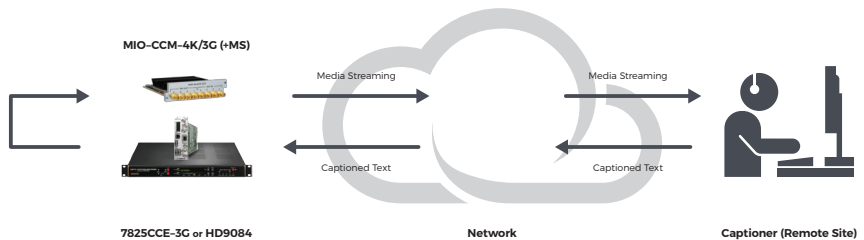

Sample Application: Captioning, Monitoring and Streaming Media Over IP

Copyright © Evertz Microsystems Ltd., all rights reserved. Information contained in this document is confidential, privileged and only for the information of the intended recipient; this file may not otherwise be used, published or redistributed without the prior written consent of Evertz Microsystems. Please consider the environment before printing this proprietary document.